

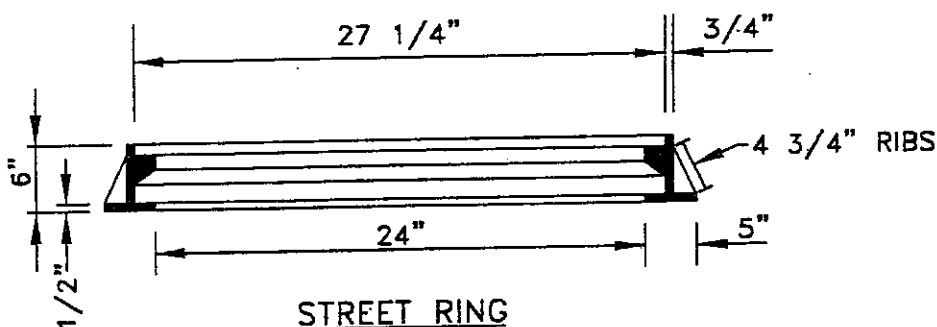


### NOTES:

1. MANHOLE COVER & FRAME SHOWN ARE ACCEPTABLE CASTINGS. CONTRACTOR SHALL SUBMIT FOR APPROVAL COMPLETE DRAWINGS AND SPECIFICATIONS OF ALTERNATE CASTINGS PROPOSED.
2. MATERIAL SHALL BE GRAY CAST IRON CONFORMING TO SECTION 75 OF THE STATE STANDARD SPECIFICATIONS. ALTERNATIVE CASTINGS SHALL BE APPROVED BY THE CITY ENGINEER.
3. STREET MANHOLE COVERS AND FRAMES SHALL BE DESIGNED TO SUPPORT A WHEEL LOAD OF 16,000 POUNDS PLUS 25% ALLOWANCE FOR IMPACT.
4. ALL BEARING SURFACES SHALL HAVE A MACHINED FIT.
5. COVERS SHALL BE INSCRIBED "LOS ALTOS HILLS" AND HAVE THE FOLLOWING LETTER DESIGNATIONS:  
S - SANITARY SEWER  
D - DRAINAGE  
NO LETTER -- ALL OTHER USES

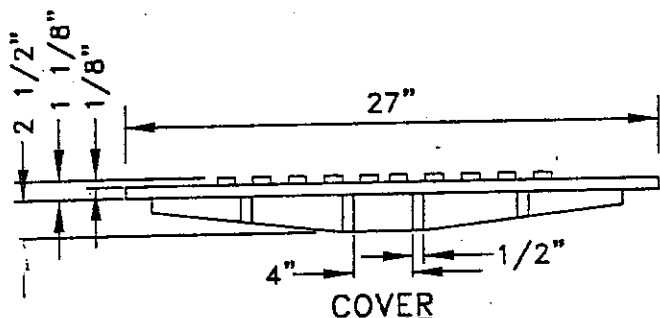

TITLE

## MANHOLE COVER AND FRAME

ADOPTED BY  
CITY COUNCIL  
DATE: 5/21/97

SCALE: NONE  
DATE: MAY 1997  
DWN:  
CHK: JMP

STANDARD DETAIL

19

SHT. 1 OF 1